




SAE Cavity Cartridge Valve

Pressure Control
Flow Control
Directional
Filter

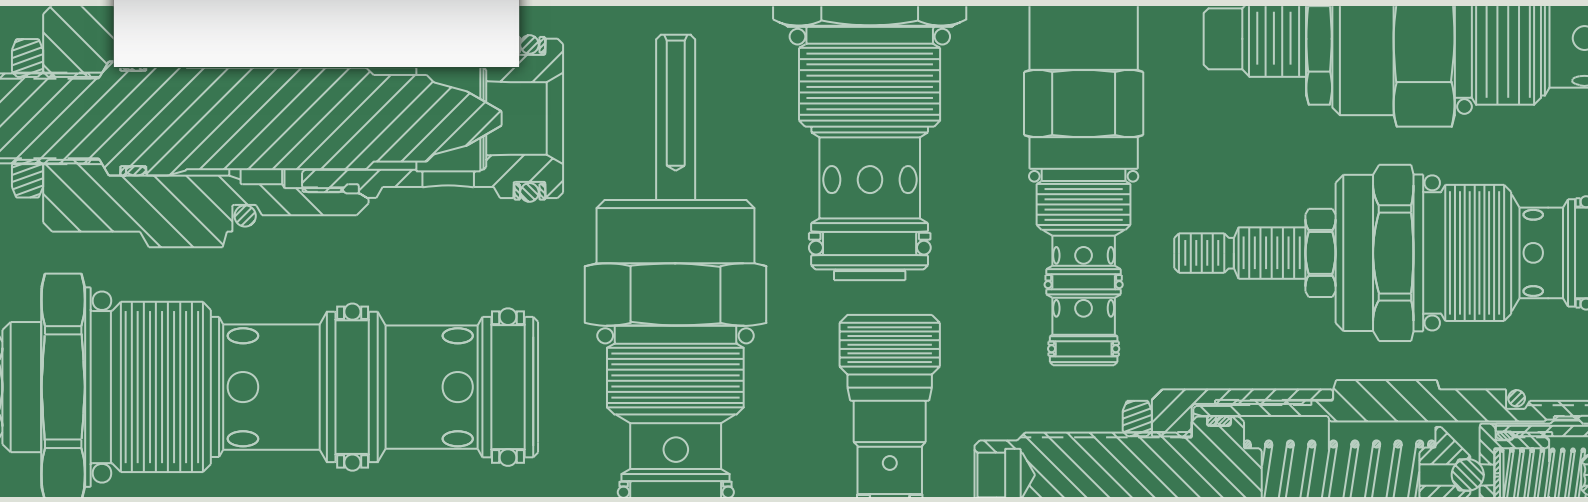

Contents

SAE Cavity Cartridge Valve

Pressure Control

Relief Valve Cartridge Direct Acting Poppet Type	RV-20	04
Relief Valve Cartridge Direct Acting Differential Area Poppet Type	RV-22	06
Pilot Operated Relief Valve	RV-26	08
Bi-directional, Poppet Type Relief Valve	CR-28	10
Pressure Reducing / Relieving Cartridge Valve	PR-32	12
Pressure Reducing / Relieving, Pilot-Operated	PR-36	14
Logic Element	DPS2-10	16

Flow Control

Flow Control Valve	FC-20	18
Needle Valve	NV-20	20
Adjustable Pressure Compensated Priority Flow Regulator Valve Cartridge	FR-33	22
Adjustable Pressure Compensated Flow Regulator Valve Cartridge	FR-39	24
2-Way Flow Regulator, Pressure Compensated, Not Adjustable	VSK2	26

Directional

Check Valve, Ball Type	CV04-20	28
Check Valve, Ball Type	CV-20	30
Check Valve, Poppet Type	CV-21	32
Load Shuttle Valve	LS-30	34
Manual Rotary 3 Way, 2 Position Directional Valve	MR-31	36
Check Valve, Pilot-to-Open	PC-30	38
Check Valve, Pilot-to-Open, 2:1 Pilot Ratio	PC-32	40
Dual Pilot Operated Check Valve	DC-40	42
Pressure Compensator	PCS4-10	44


Filter

.....	CF10	46
-------	------------	----

RV-20



SYMBOLS



ORDER CODES

RV 08 H - 20 - N - 18

1 2 3 1 4 5

1	Model Name	RV-20	
2	Valve Size	08, 10	
3	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
		H	factory preset hidden adj.
4	Material of Seal	N	buna-N
		V	viton
5	Spring Range		
		RV08-20	
		RV10-20	
		05	3.45 ~ 41.4 ±6.9bar (50 ~ 600 ±100psi)
		09	6.90 ~ 89.6 ±13.8bar (100 ~ 1300 ±200psi)
		18	17.24 ~ 179.3 ±20.7bar (250 ~ 2600 ±300psi)
		33	17.24 ~ 278.8 ±27.6bar (250 ~ 4000 ±400psi)
		06	3.45 ~ 41.38bar (50 ~ 600psi)
		12	10.34 ~ 82.76bar (150 ~ 1200psi)
		23	17.24 ~ 158.62bar (250 ~ 2300psi)
		33	17.24 ~ 227.59bar (250 ~ 3300psi)

MODEL SPEC.



Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
RV08-20	SAE-08-2	276	483	22.7	0.25	25.8 - 28.5	0.22
RV10-20	SAE-10-2	228	517	37.9	0.25	33.9	0.235

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Rise


* 32cSt / 150 ssu oil at 40°C

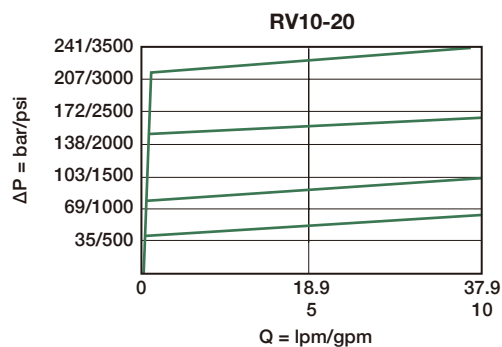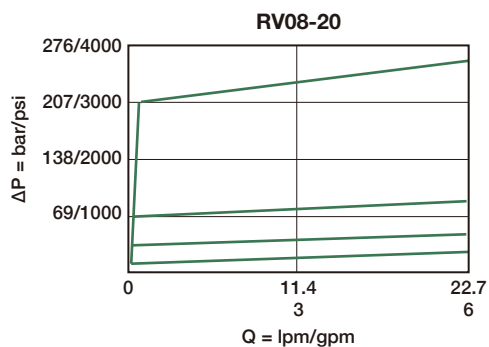


DIMENSION

(UNIT : mm)

► RV08-20

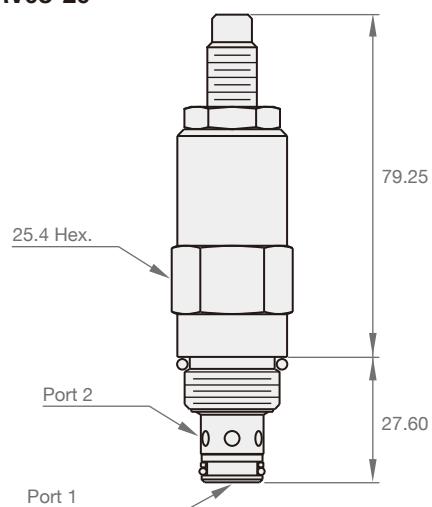


► RV10-20

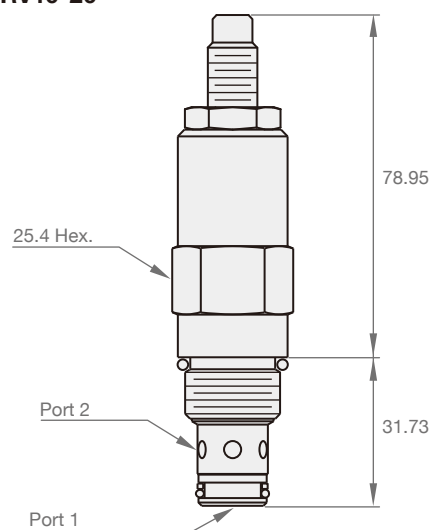

RV-22



SYMBOLS



ORDER CODES

RV	10	A	-	22	-	N	-	25
①	②	③		①		④		⑤

①	Model Name	RV-22	
②	Valve Size	08, 10	
③	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
④	Material of Seal	N	buna-N
		V	viton
⑤	Spring Range		
		RV08-22	RV10-22
04	3.4 ~ 27.6bar (50 ~ 400psi)	06	10.34 ~ 41.38bar (150 ~ 600psi)
07	6.9 ~ 62.1bar (100 ~ 900psi)	12	10.34 ~ 89.66bar (150 ~ 1300psi)
13	6.9 ~ 117.2bar (100 ~ 1700psi)	25	25.86 ~ 165.52bar (375 ~ 2400psi)
26	17.2 ~ 220.7bar (250 ~ 3200psi)	35	17.24 ~ 241.38bar (250 ~ 3500psi)

MODEL SPEC.



Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
RV08-22	SAE-08-2	248	483	30.2	0.25	27.1	0.22
RV10-22	SAE-10-2	241	517	113.6	0.25	33.9	0.235

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Rise


* 32cSt / 150 ssu oil at 40°C

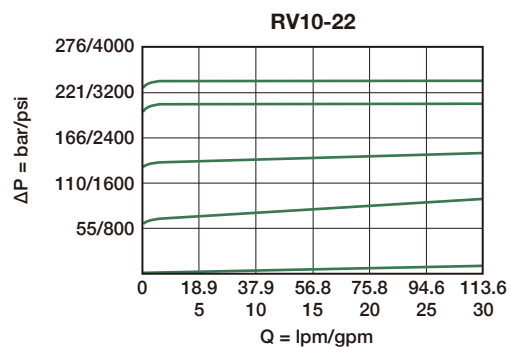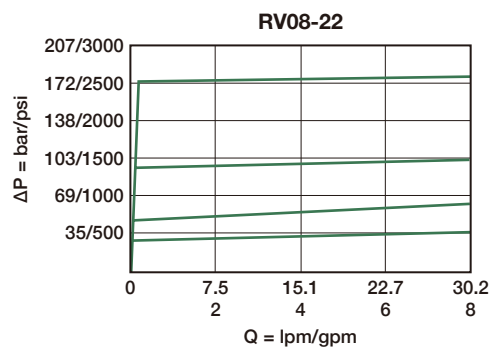


DIMENSION

(UNIT : mm)

► RV08-22

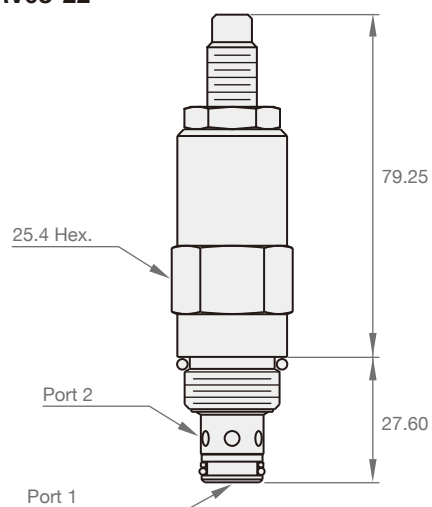


► RV10-22

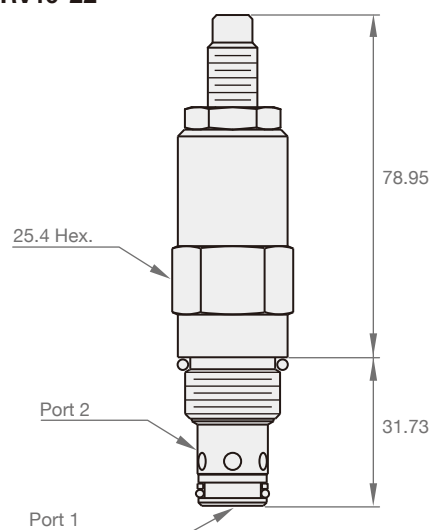

RV-26



SYMBOLS



ORDER CODES

RV 10 A - 26 - N - 30

① ② ③ ④ ⑤

① ▶	Model Name	RV-26	
② ▶	Valve Size	10, 12, 16	
③ ▶	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
④ ▶	Material of Seal	N	buna-N
		V	viton

⑤ ▶ Spring Range

RV10-26		RV12-26		RV16-26	
04	6.9 ~ 27.6bar (100 ~ 400psi)	04	6.9 ~ 27.6bar (100 ~ 400psi)	03	9.7 ~ 20.7bar (140 ~ 300psi)
15	10.3 ~ 103.4bar (150 ~ 1500psi)	15	3.8 ~ 110.3bar (200 ~ 1600psi)	06	15.9 ~ 41.4bar (230 ~ 600psi)
30	27.6 ~ 206.9bar (400 ~ 3000psi)	30	31.0 ~ 206.9bar (450 ~ 3000psi)	15	36.6 ~ 103.5bar (530 ~ 1500psi)
		35	34.5 ~ 241.4bar (500 ~ 3500psi)	35	82.8 ~ 241.6bar (1200 ~ 3500psi)

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (l/min)	Installation Torque (Nm)	Weight (kg)
RV10-26	SAE-10-2	240	420	113.6	115	33.9	0.23
RV12-26	SAE-12-2	240	420	189.3	115	40.6	0.345
RV16-26	SAE-16-2	276	420	302.8	115	67.7	0.56




* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Rise

— Port 1 → Port 2


* 32cSt / 150 ssu oil at 40°C

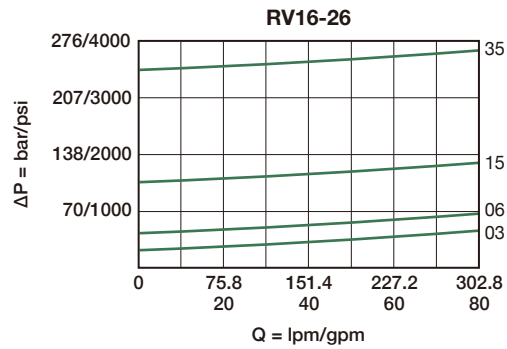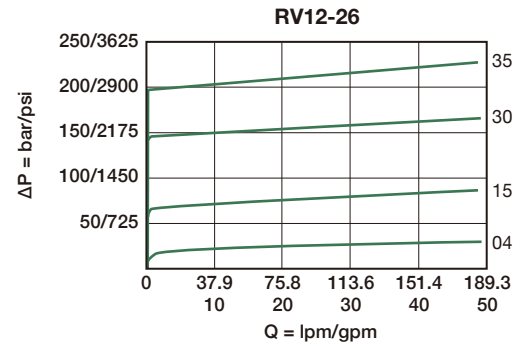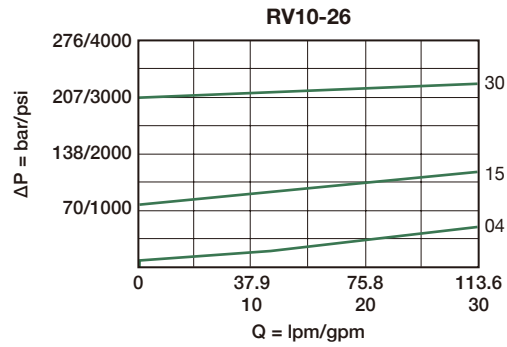


DIMENSION

(UNIT : mm)


► RV10-26

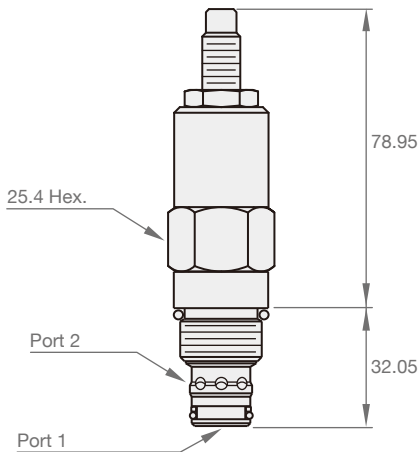

► RV12-26

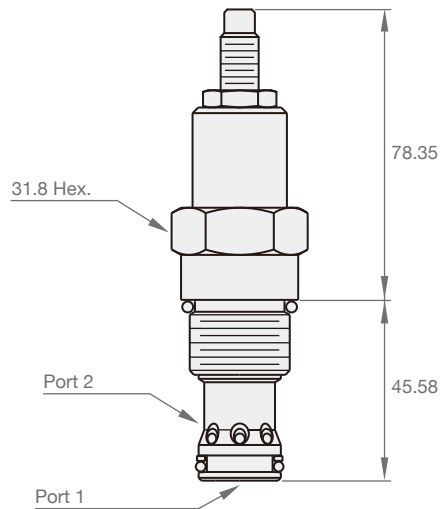


► RV16-26

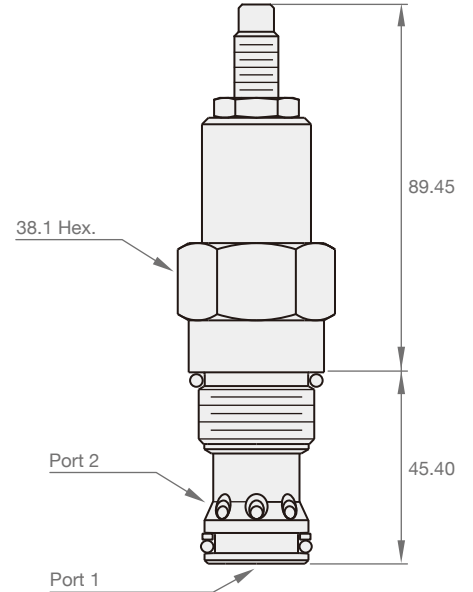

CR-28



SYMBOLS



ORDER CODES

CR 08 A - 28 - N - 15

1 2 3 1 4 5

1	Model Name	CR-28	
2	Valve Size	08, 10	
3	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
4	Material of Seal	N	buna-N
		V	viton
5	Spring Range	15	6.9 ~ 103.4bar (100 ~ 1500psi)
		30	51.7 ~ 206.9bar (750 ~ 3000psi)
		50	103.4 ~ 344.8bar (1500 ~ 5000psi)


MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
CR08-28	SAE-08-2	350	420	37	85	27.1	0.22
CR10-28	SAE-10-2	350	420	75	85	33.9	0.18

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Rise

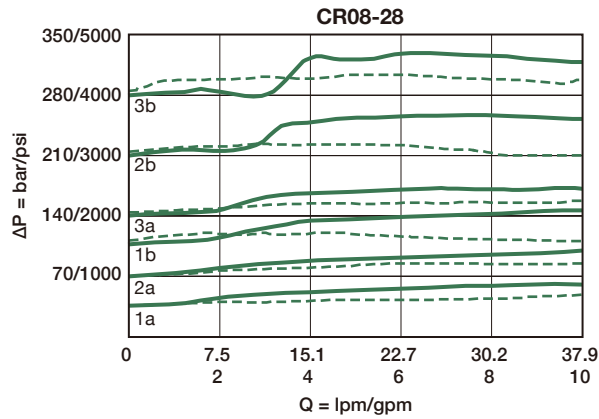

— Port 1 → Port 2

- - - Port 2 → Port 1

3b = 5000psi - P_N 4000psi (275bar)


3a = 5000psi - P_N 2000psi (137bar)

2b = 3000psi - P_N 3000psi (206bar)

2a = 3000psi - P_N 1000psi (68bar)

1b = 1500psi - P_N 1500psi (103bar)

1a = 1500psi - P_N 500psi (34bar)

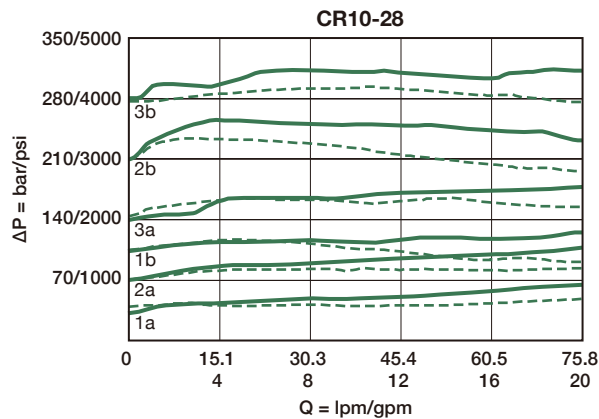

— Port 1 → Port 2

- - - Port 2 → Port 1

3b = 5000psi - P_N 4000psi (275bar)

3a = 5000psi - P_N 2000psi (137bar)

2b = 3000psi - P_N 3000psi (206bar)

2a = 3000psi - P_N 1000psi (68bar)

1b = 1500psi - P_N 1500psi (103bar)


1a = 1500psi - P_N 500psi (34bar)

* 33cSt / 150 ssu oil


DIMENSION

(UNIT : mm)

► CR08-28

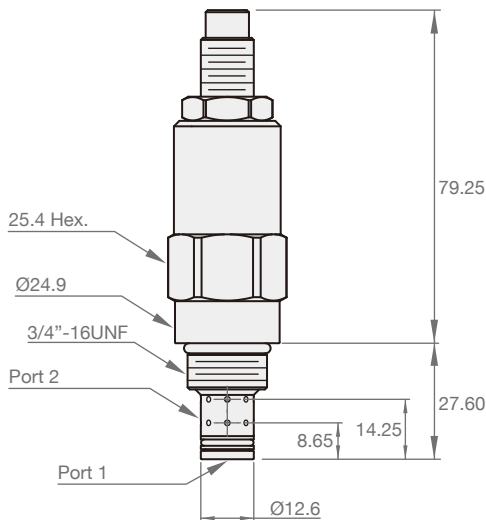


► CR10-28

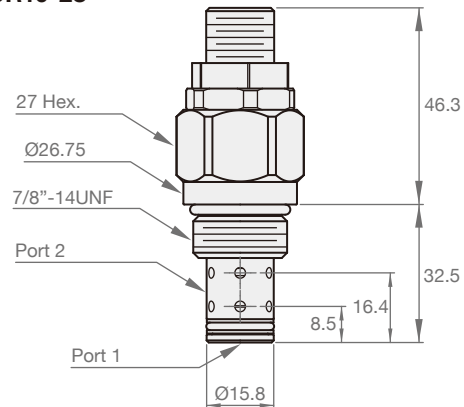

PR-32



SYMBOLS



ORDER CODES

PR	10	A	-	32	-	N	-	15
①	②	③		①		④		⑤

①	Model Name	PR-32	
②	Valve Size	08, 10	
③	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
④	Material of Seal	N	buna-N
		V	viton
⑤	Spring Range		
		PR08-32	PR10-32
03	3.4 ~ 20.7bar (50 ~ 300psi)	04	5.5 ~ 27.6bar (80 ~ 400psi)
06	10.4 ~ 41.4bar (150 ~ 600psi)	08	13.8 ~ 55.2bar (200 ~ 800psi)
12	20.7 ~ 82.8bar (300 ~ 1200psi)	15	20.7 ~ 103bar (300 ~ 1500psi)
22	34.5 ~ 151.7bar (500 ~ 2200psi)	21	27.6 ~ 145bar (400 ~ 2100psi)

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
PR08-32	SAE-08-3	240	390	11.4	82 ^{*1}	27.1	0.23
PR10-32	SAE-10-3	207	517	30.2	82 ^{*1}	33.9	0.25



*1. Port2 to Port3, setting 206.8bar

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Rise


* 32cSt / 150 ssu oil at 40°C

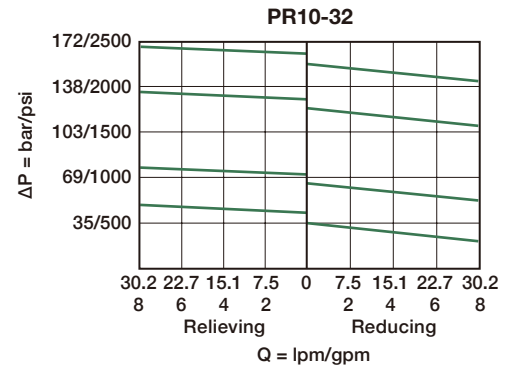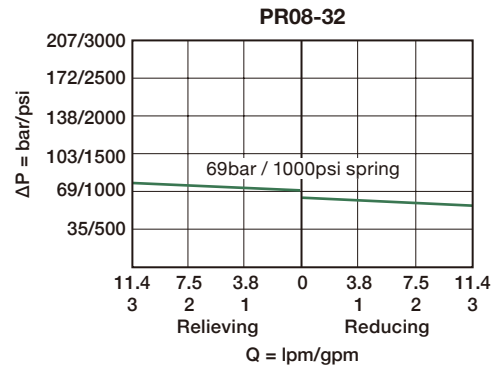


DIMENSION

(UNIT : mm)

► PR08-32

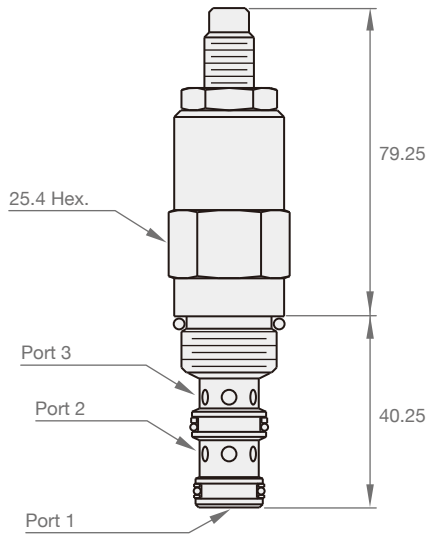


► PR10-32

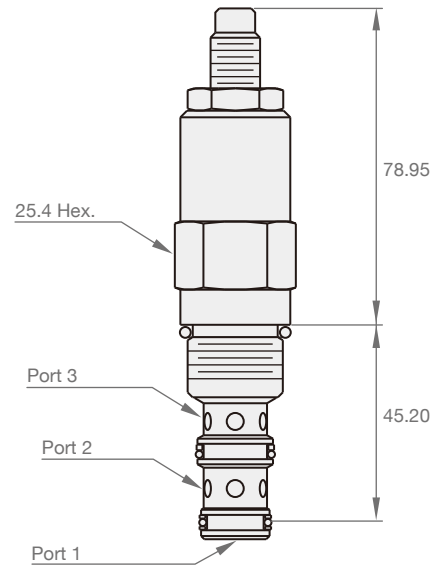

PR-36



SYMBOLS



ORDER CODES

PR	10	A	-	36	-	N	-	15
①	②	③		①		④		⑤

① ▶	Model Name	PR-36	
② ▶	Valve Size	10	
③ ▶	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
④ ▶	Material of Seal	N	buna-N
		V	viton
⑤ ▶	Spring Range		
		PR10-36	
	04	6.9 ~ 27.6bar (100 ~ 400psi)	
	15	10.3 ~ 103.4bar (150 ~ 1500psi)	
	30	27.6 ~ 206.9bar (400 ~ 3000psi)	

MODEL SPEC.


Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (l/min)	Installation Torque (Nm)	Weight (kg)
PR10-36	SAE-10-3	210	390	56	0.17	33.9	0.24

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES


► Pressure Rise

* 32cSt / 150 ssu oil at 40°C

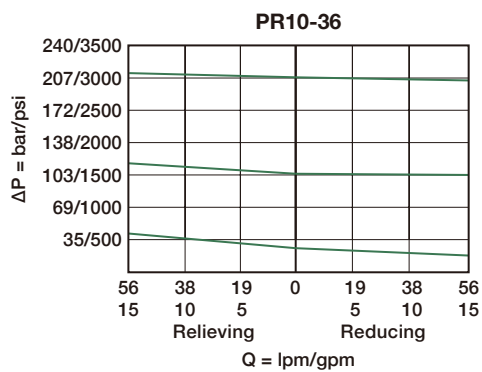

DIMENSION


(UNIT : mm)

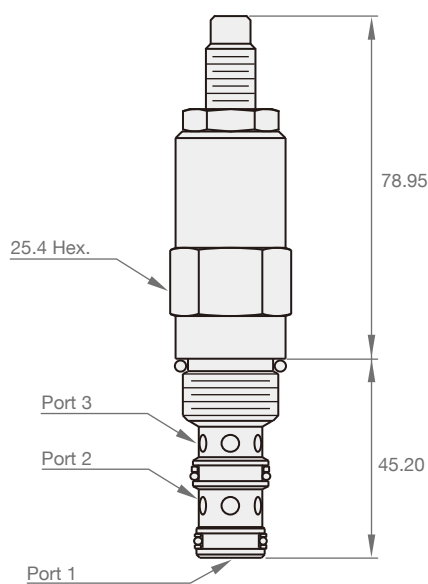

DPS2-10



SYMBOLS



ORDER CODES

DPS2 - **10** - **P** - **F** - **080**

1 2 3 4 5

1	Model Name	DPS2	
2	Valve Size	10	
3	Function	P	spool, N/C (L/S element)
4	Adjustment Option	F	unadjustable
5	Differential Pressure	080	5.5bar (80psi)

MODEL SPEC.


Model	Cavity	Operating Pressure (bar)	Rated Flow (l/min)	Pilot Ratio	Internal Leakage (cm ³ /min.)	Installation Torque (Nm)	Weight (kg)
DPS2-10	C-10-3S	290	60	1 : 1	82 @ 290bar	100	0.14

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES


► Pressure Drop

* 21.8cSt oil at 49°C

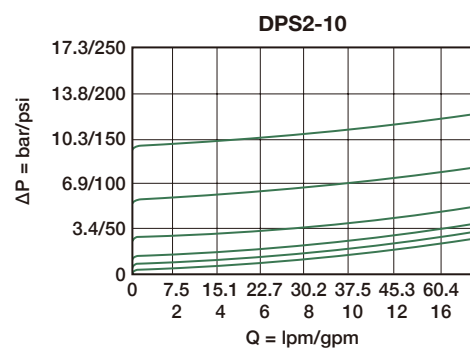

DIMENSION


(UNIT : mm)

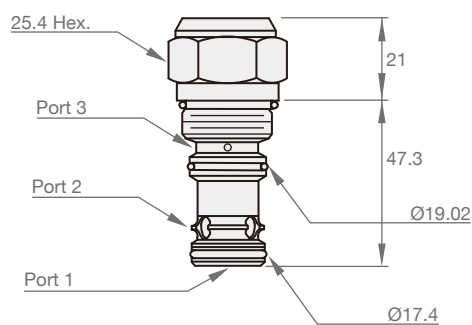

FC-20



SYMBOLS



ORDER CODES

FC	10	A	-	20	-	N
1	2	3		1		4

1	Model Name	FC-20	
2	Valve Size	10	
3	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
4	Material of Seal	N	buna-N
		V	viton

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
FC10-20	SAE-10-2	240	345	45	0.50	33.9	0.145

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)


PERFORMANCE CURVES

► Pressure Drop

FC10-20


- full open
- - - rev. flow

* 32cSt / 150 ssu oil at 40°C

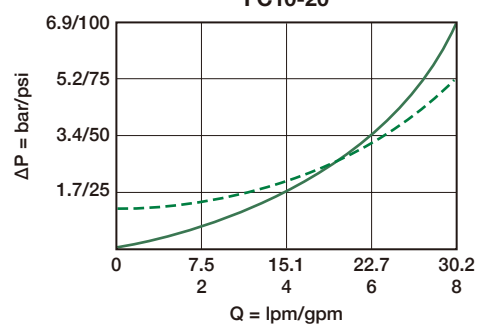

DIMENSION


(UNIT : mm)

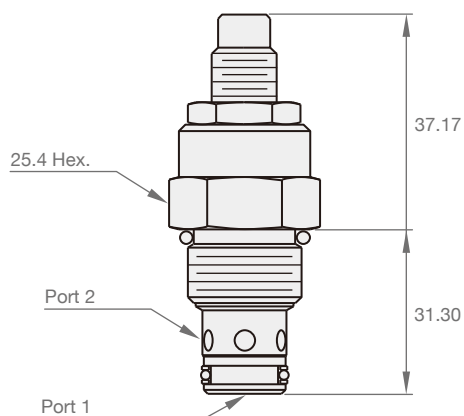

NV-20



SYMBOLS



ORDER CODES

NV	08	A	-	20	-	N
1	2	3		1		4

1	Model Name	NV-20	
2	Valve Size	08, 10, 12	
3	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
4	Material of Seal	N	buna-N
		V	viton

MODEL SPEC.


Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
NV08-20	SAE-08-2	240	345	42	0.32	27.1	0.115
NV10-20	SAE-10-2	240	345	45	0.05	33.9	0.145
NV12-20	SAE-12-2	240	345	113.6	0.15	47.4	0.3

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)


PERFORMANCE CURVES

► Pressure Drop


Full Open Port 2 → Port 1 or Port 1 → Port 2

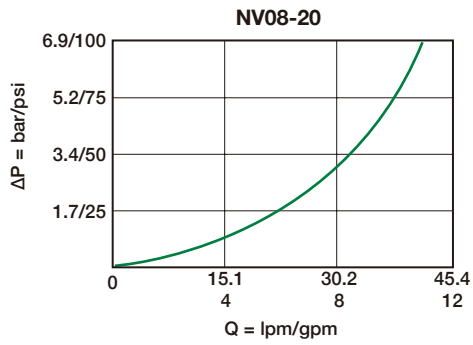


► Pressure Drop

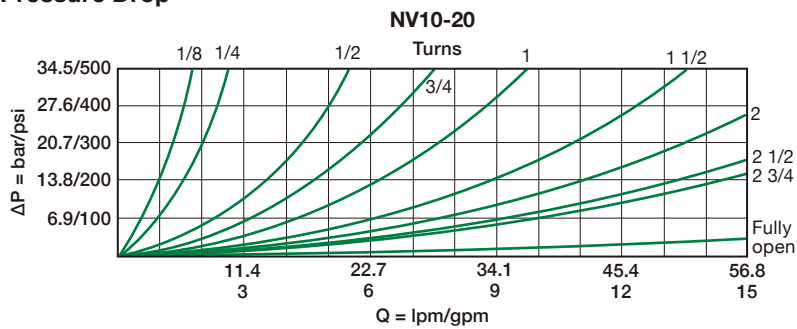


► Flow vs. Turns

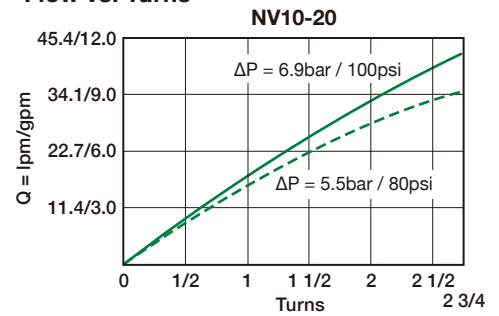

► Pressure Drop

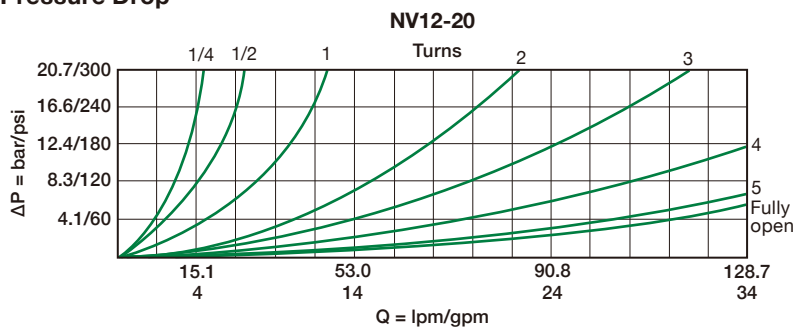

► Flow vs. Turns

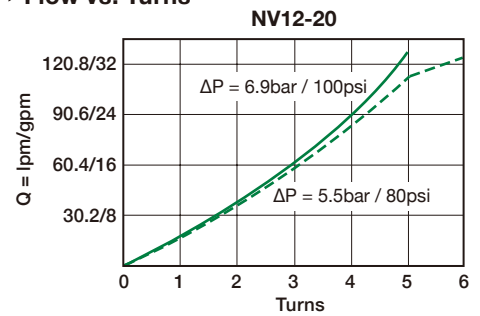


* 32cSt / 150 ssu oil at 40°C


DIMENSION

(UNIT : mm)


► NV08-20

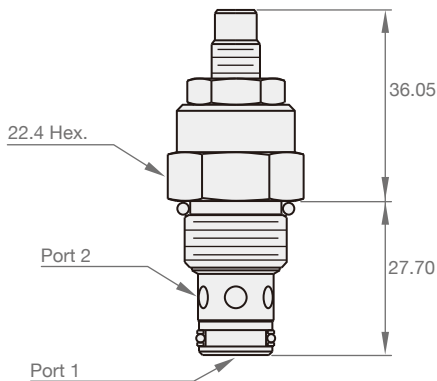

► NV10-20

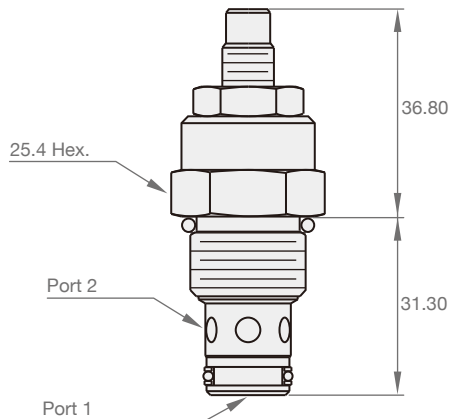


► NV12-20

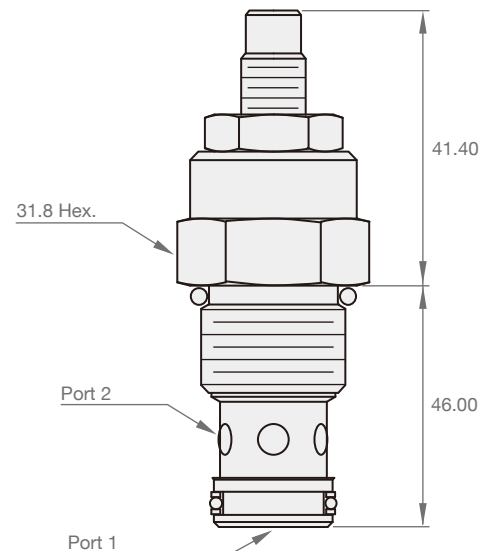


FR-33



SYMBOLS



3-Ported :



ORDER CODES

FR	12	A	-	33	-	N
1	2	3		1		4

1	Model Name	FR-33	
2	Valve Size	12	
3	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
4	Material of Seal	N	buna-N
		V	viton

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (l/min)	Installation Torque (Nm)	Weight (kg)
FR12-33	SAE-12-3	240	345	3-ported : 0 ~ 68 2-ported : 0 ~ 45	0.12 *1	47	0.235


*1. at Port3, setting 206.8bar

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Flow vs. Turns


103bar / 1500psi

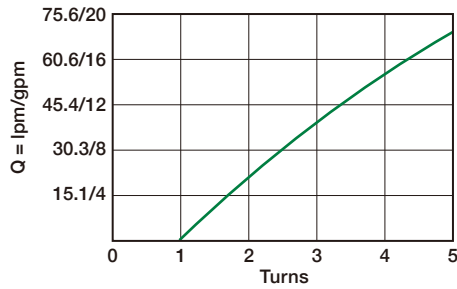

► Pressure Drop vs. Reverse Flow


Port 3 → Port 1

240bar / 3500psi Inlet Pressure

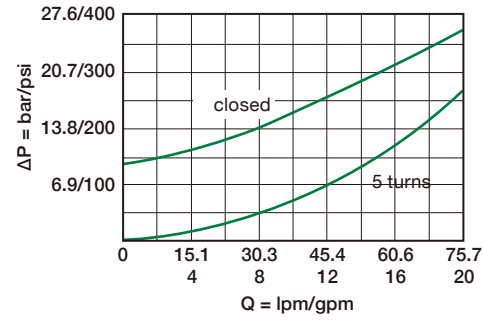

► Regulated Flow vs. Pressure


at 76lpm / 20gpm Input Flow

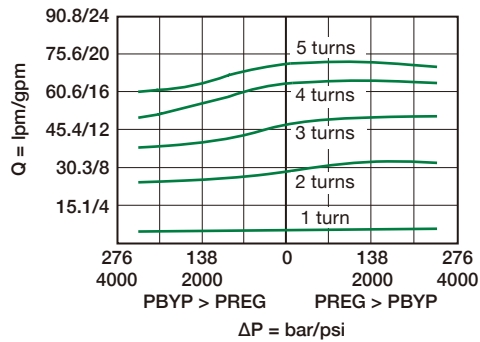

* 32cSt / 150 ssu oil at 40°C

DIMENSION


(UNIT : mm)

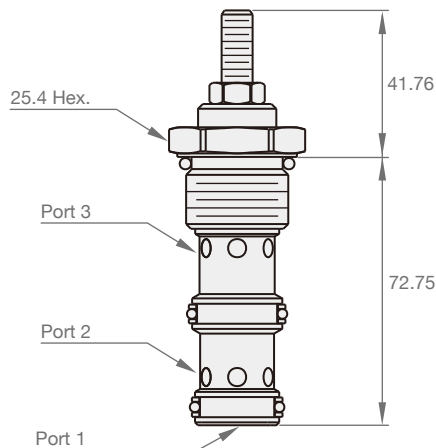


FR-39




SYMBOLS



2-Ported :



3-Ported :



ORDER CODES

FR 10 A - 39 - N

① ② ③ ① ④

①	Model Name	FR10-39	
②	Valve Size	10	
③	Adjustment Option	A	1/4" Hex allen head
		B	1 1/2" dia alum. knob
④	Material of Seal	N	buna-N
		V	viton

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (l/min)	Installation Torque (Nm)	Weight (kg)
FR10-39	SAE-10-3	240	345	3-ported : 0 ~ 38 2-ported : 0 ~ 34	0.38	33.9	0.135

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)


PERFORMANCE CURVES

► Regulated Flow vs. Turns

103bar / 1500psi at Port 3

2-Ported : at 123bar / 1800psi inlet pressure


3-Ported : at 38lpm / 10gpm inlet flow

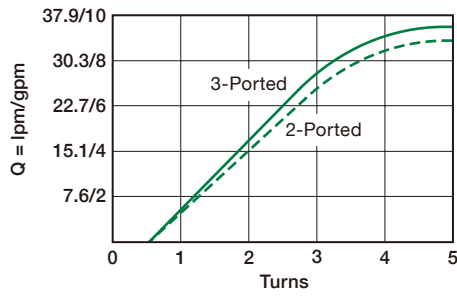

► Pressure Drop vs. Reverse Flow


Port 3 → Port 1

34.5bar / 500psi Inlet Pressure

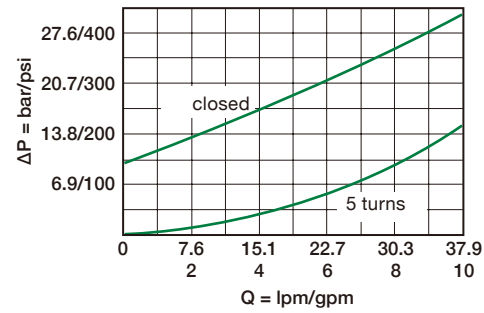


► 2-Ported Regulated Flow vs. Pressure Drop

at 240bar / 3500psi Inlet

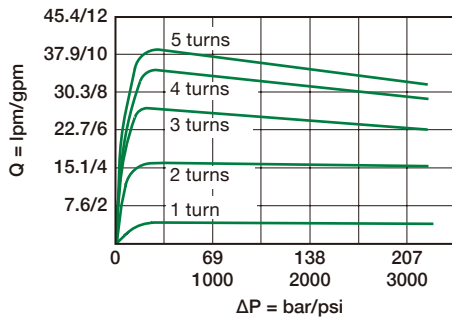

► 3-Ported Regulated Flow vs. Load


at 38lpm / 10gpm Inlet

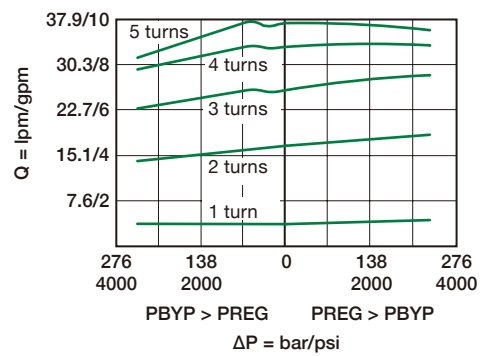

* 32cSt / 150 ssu oil at 40°C

DIMENSION


(UNIT : mm)

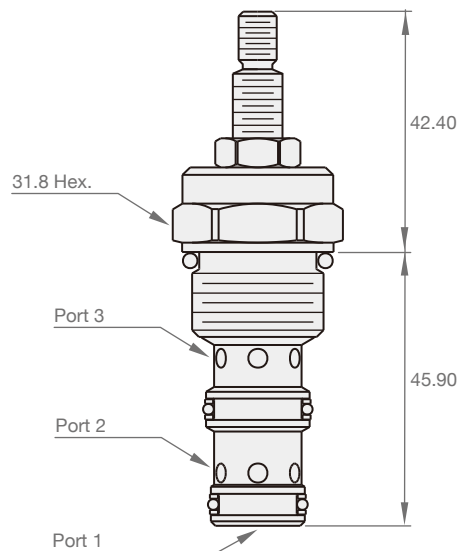

VSK2



SYMBOLS

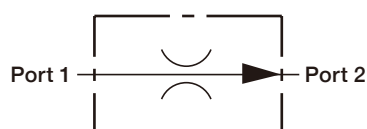

ORDER CODES

VSK **2** - **M2** - **100**

1 2 3 4

1	Model Name	VSK	
2	Valve Size	2	screw-in cartridge
3	Cavity	M2	M18 * 1.5
4	Orifice Diameter (mm/100)	55, 80, 100, 120, 160, 180, 210, 230, 260	

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Flow (l/min)	Weight (kg)
VSK2-M2	M18 * 1.5	320	15	0.025

* Operating temperature : -30 ~ 120°C (-22 ~ 248°F)


Approximate Flow Rates Corresponding to Orifice Diameter

Orifice Diameter (mm/100)	Flow Range at 32bar ^{*2} (l/min)	Orifice Diameter (mm/100)	Flow Range at 32bar ^{*2} (l/min)
55	0.3 ~ 0.6	180	5.6 ~ 7.1
80	1.4 ~ 1.7	210	8.5 ~ 10.8
100	1.8 ~ 2.4	230	10.7 ~ 13.3
120	3.1 ~ 4.0	260	12.0 ~ 16.4
160	5.5 ~ 6.5		


^{*2} Adjusted to customer spec. at manufacturer.

PERFORMANCE CURVES

► Regulated Flow as a Function of Valve Pressure Drop for Individual Orifice Diameters

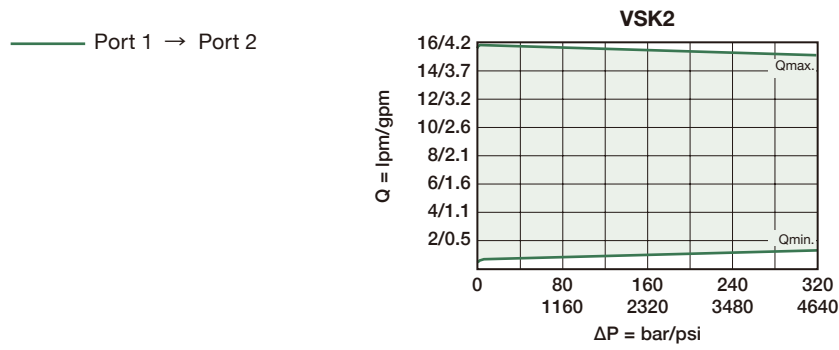

► Pressure Drop Related to Flow Rate

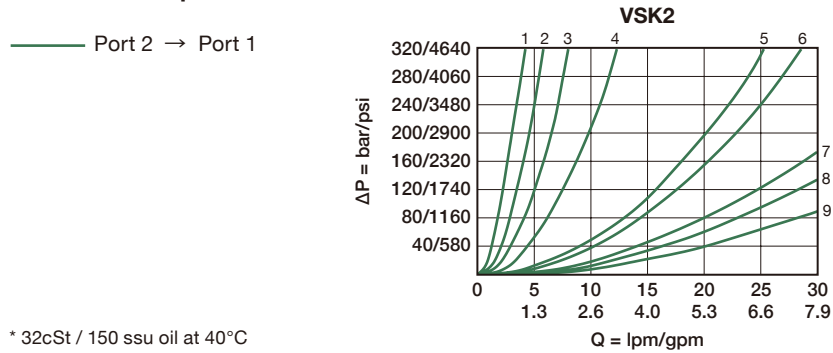


Orifice Diameter (mm/100)					
No.	1	2	3	4	5
Orifice	55	80	100	120	150
No.	6	7	8	9	
Orifice	180	210	230	260	

* 32cSt / 150 ssu oil at 40°C


DIMENSION

(UNIT : mm)

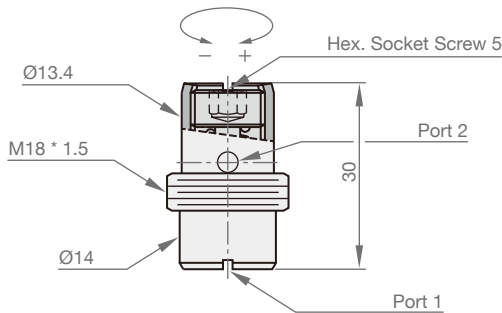

CAVITY TOOLING


(UNIT : mm)

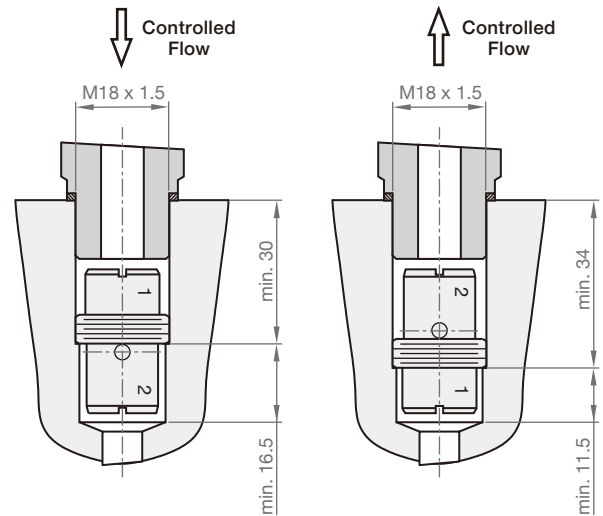

CV04-20



SYMBOLS



ORDER CODES

CV **04** - **B** **20** - **N** - **05**

1 2 3 1 3 4

1	Model Name	CV-20	
2	Valve Size	04	
3	Mounting	B	down-hole mount
		none	surface mount
4	Material of Seal	N	buna-N
		V	viton
5	Bias Spring	05	0.34bar (5psi)

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
CV04-B20	SAE-04-2	240	350	5.7	0.10	5.4 ~ 6.7	0.01
CV04-20	SAE-04-2	240	350	5.7	0.10	16 ~ 19	0.01


* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Drop

— Port 1 → Port 2


* 32cSt / 150 ssu oil at 40°C

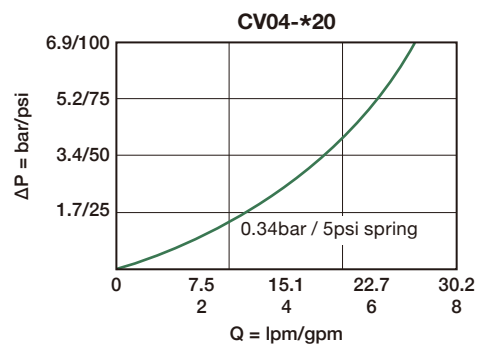


DIMENSION

(UNIT : mm)

► CV04-B20

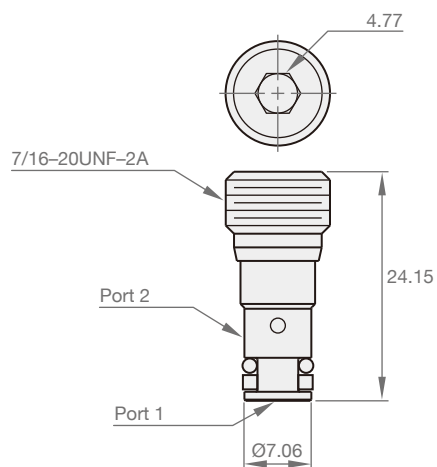


► CV04-20

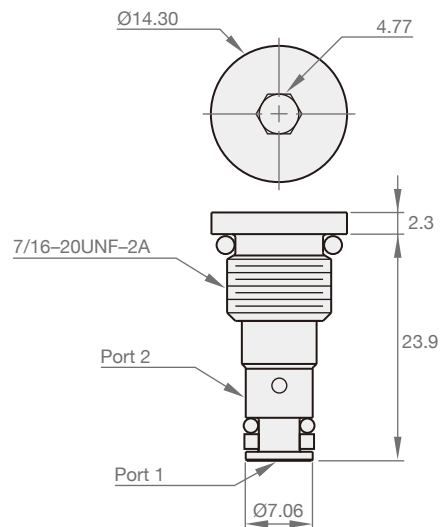

CV-20



SYMBOLS



ORDER CODES

CV **08** - **20** - **N** - **05**

1 2 1 3 4

1	Model Name	CV-20	
2	Valve Size	08, 10, 12, 16	
3	Material of Seal	N	buna-N
		V	viton

4 ▶ Bias Spring

CV08-20		CV10-20		CV12-20		CV16-20	
05	0.34bar (5psi)	05	0.34bar (5psi)	05	0.34bar (5psi)	05	0.34bar (5psi)
30	2.1bar (30psi)	30	2.1bar (30psi)	50	3.5bar (50psi)	50	3.5bar (50psi)
50	3.5bar (50psi)	50	3.5bar (50psi)				
		100	6.9bar (100psi)				

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
CV08-20	SAE-08-2	240	350	30	0.10	27.1	0.05
CV10-20	SAE-10-2	240	350	76	0.10	33.9	0.08
CV12-20	SAE-12-2	240	420	95	0.25	47.5	0.17
CV16-20	SAE-16-2	240	350	151	0.25	67.7	0.27





* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Drop

- Port 1 → Port 2
- - - Port 1 → Port 2


* 32cSt / 150 ssu oil at 40°C

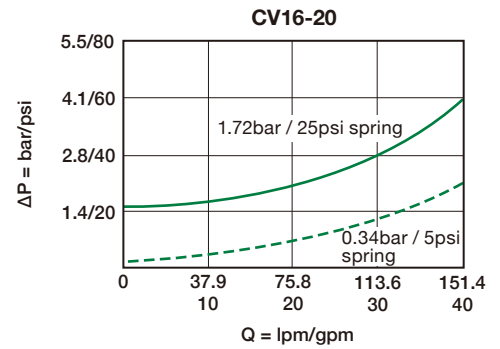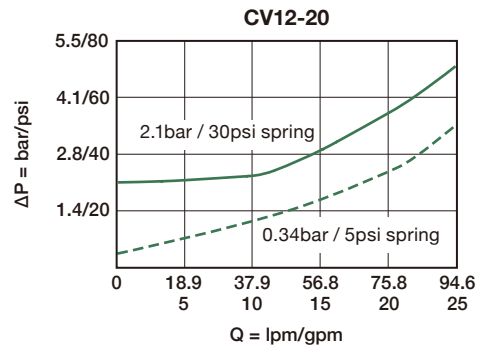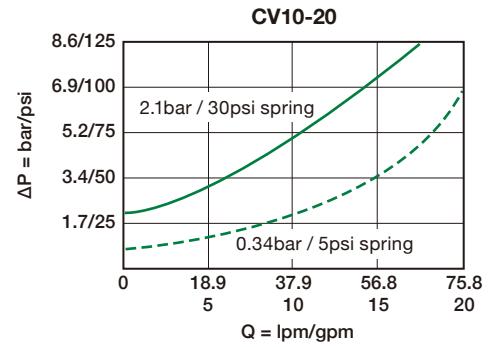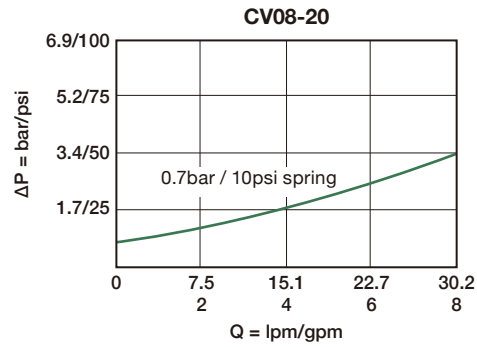


DIMENSION

(UNIT : mm)


► CV08-20

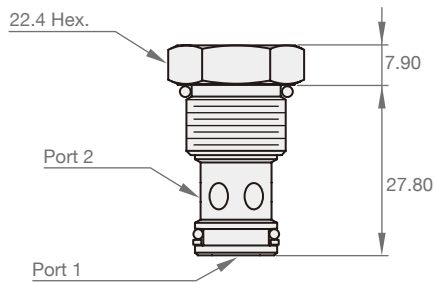


► CV10-20

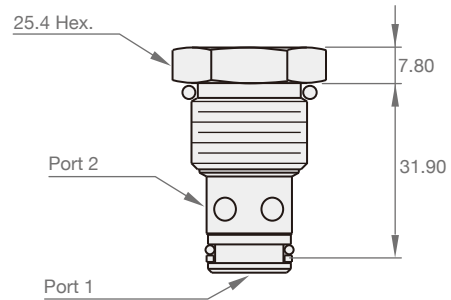

► CV12-20

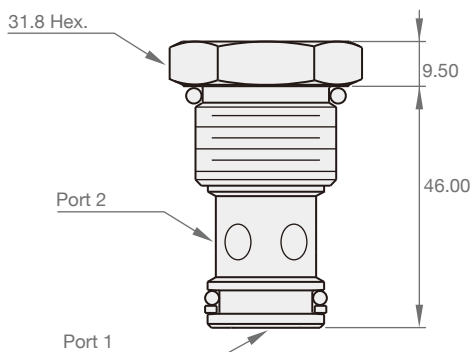


► CV16-20

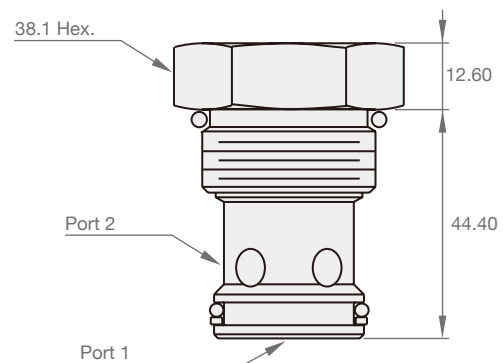

CV-21



SYMBOLS



ORDER CODES

CV	10	-	21	-	N	-	25
①	②		①		③		④

① ▶	Model Name	CV-21	
② ▶	Valve Size	08, 10, 12	
③ ▶	Material of Seal	N	buna-N
		V	viton

④ ▶ Bias Spring

CV08-21		CV10-21		CV12-21	
none		25	1.75bar (25psi)	none	

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
CV08-21	SAE-08-2	210	420	30.2	0.25	27.1	0.053
CV10-21	SAE-10-2	210	420	56	0.1	33.9	0.08
CV12-21	SAE-12-2	240	350	113.6	0.25	47.5	0.165




* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Drop

— Port 2 → Port 1


* 32cSt / 150 ssu oil at 40°C

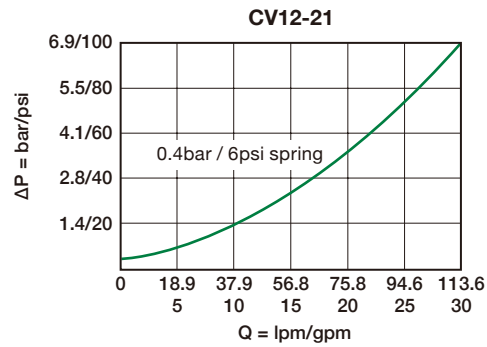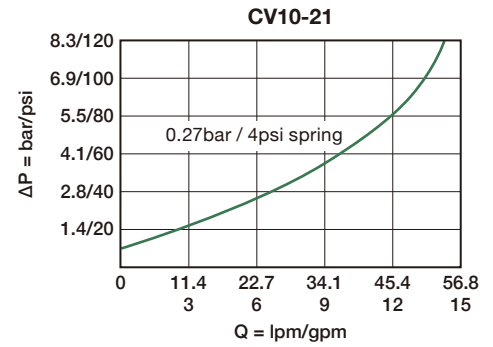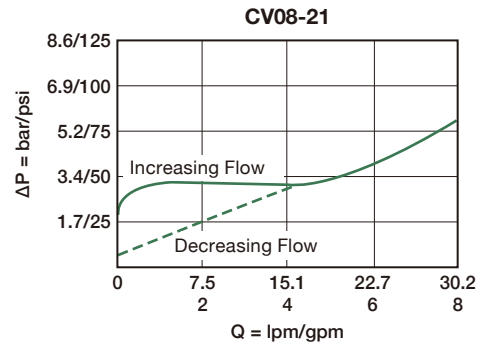


DIMENSION

(UNIT : mm)


► CV08-21

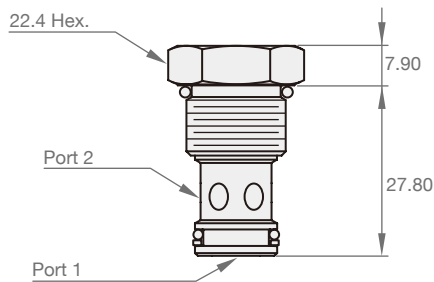

► CV10-21

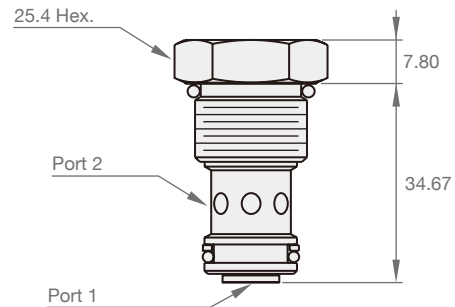


► CV12-21

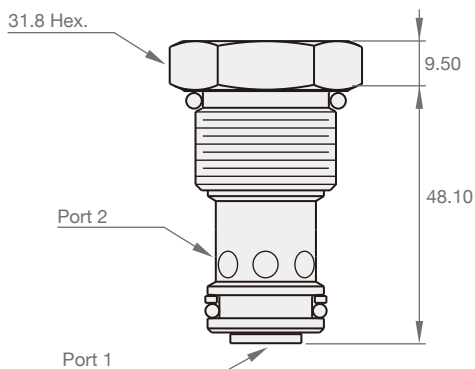

LS-30



SYMBOLS



ORDER CODES

LS	08	-	30	-	N
1	2		1		3

1	Model Name	LS04-B30, LS-30	
2	Valve Size	04, 08, 10	
3	Material of Seal	N	buna-N
		V	viton

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
LS04-B30	SAE-04-3	240	350	4.8	0.25	5.4 ~ 6.7	0.01
LS08-30	SAE-08-3	240	390	18.9	0.25	27.1	0.065
LS10-30	SAE-10-3	240	390	30.2	0.25	33.9	0.085




* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Drop

— Port 1 → Port 3 or 2


* 32cSt / 150 ssu oil at 40°C

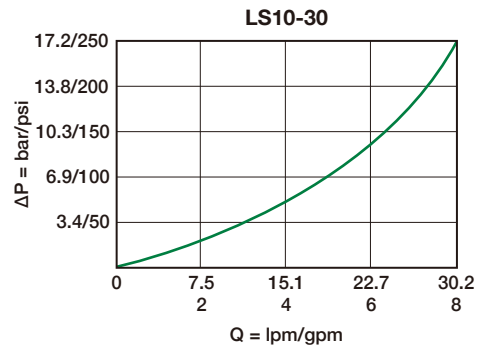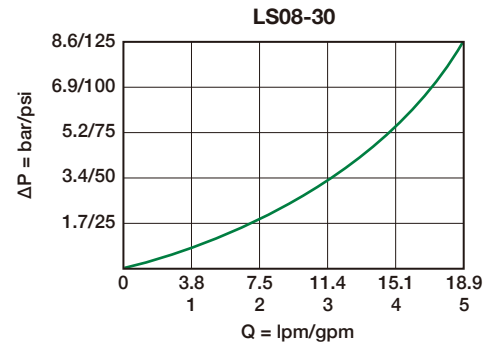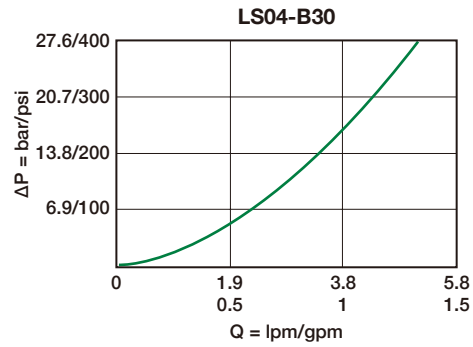


DIMENSION

(UNIT : mm)


► LS04-B30

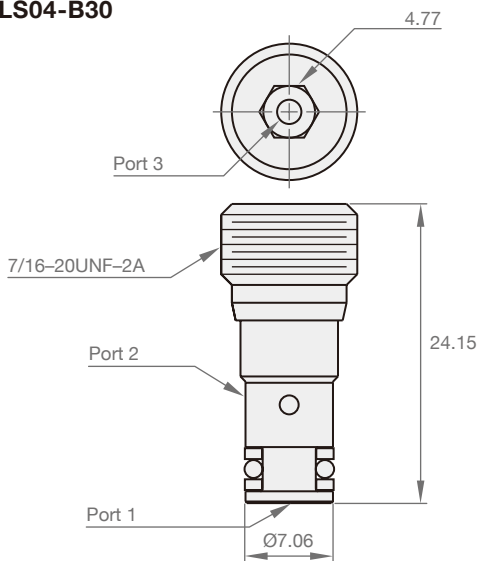

► LS08-30

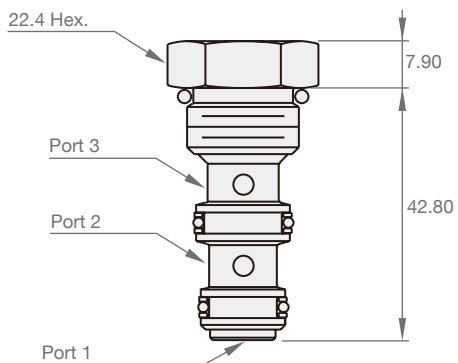


► LS10-30

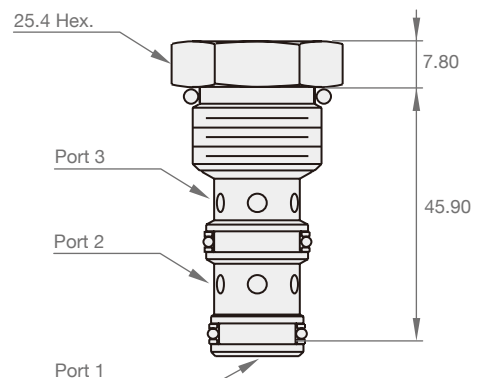

MR-31



SYMBOLS

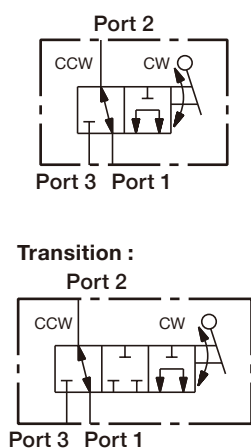

ORDER CODES

MR **10** - **31** - **N**

① ② ① ③

① ▶ **Model Name** **MR-31**

② ▶ **Valve Size** **10**

③ ▶ **Material of Seal** **N** buna-N

V viton

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Proof Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
MR10-31	SAE-10-3	240	350	37.9	164	33.9	0.14

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)


PERFORMANCE CURVES

► Pressure Drop

— Port 2 → Port 1


- - - Port 3 → Port 1

* 32cSt / 150 ssu oil at 40°C

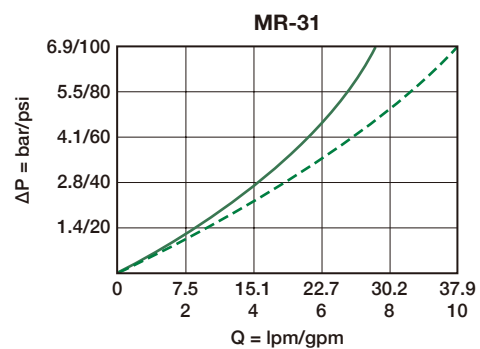

DIMENSION


(UNIT : mm)

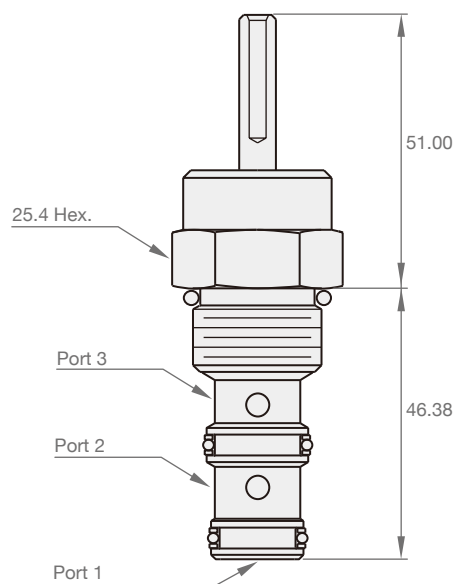

PC-30



SYMBOLS



ORDER CODES

PC	08	-	30	-	N	-	25
1	2		1		3		4

1	Model Name	PC-30	
2	Valve Size	08, 10	
3	Material of Seal	N	buna-N
		V	viton
4	Bias Spring (PC08-30)	25	1.7bar (25psi)
		70	4.8bar (70psi)
		90	6.2bar (90psi)
		120	8.2bar (120psi)
		270	18.3bar (270psi)
4	Bias Spring (PC10-30)	30	2.1bar (30psi)
		70	4.8bar (70psi)
		90	6.2bar (90psi)
		120	8.2bar (120psi)
		270	18.3bar (270psi)

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Pilot Ratio	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
PC08-30	SAE-08-3	240	3:1	28.3	0.10	27.1	0.065
PC10-30	SAE-10-3	240	4:1	30.2	0.10	33.9	0.090

* Check bias spring : 2.07 bar (30psi)



* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Drop

- Port 3 → Port 2 (p)
- - - Port 2 → Port 3 (r)


* 32cSt / 150 ssu oil at 40°C

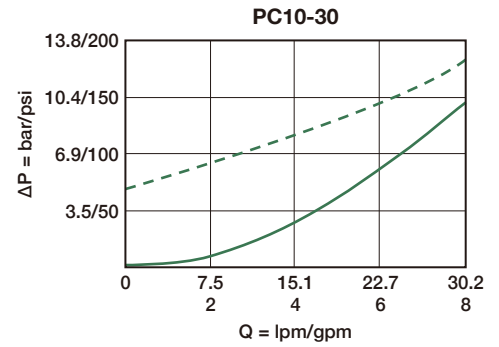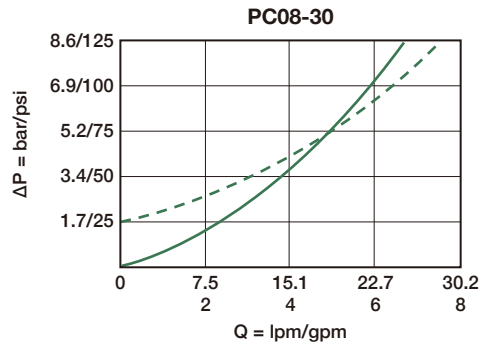


DIMENSION

(UNIT : mm)

► PC08-30

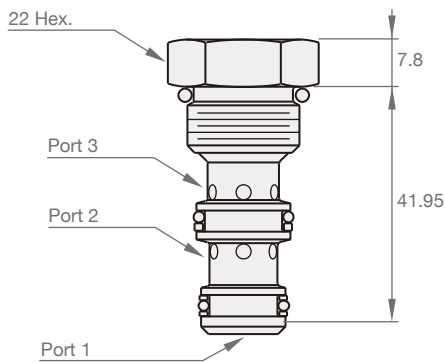


► PC10-30

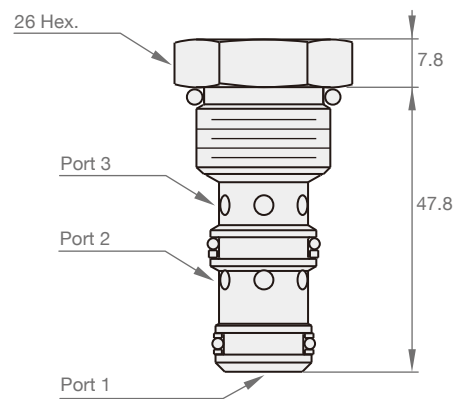

PC-32



SYMBOLS



ORDER CODES

PC	10	-	32	-	N	-	30
1	2		1		3		4

1	Model Name	PC-32	
2	Valve Size	10	
3	Material of Seal	N	buna-N
		V	viton
4	Bias Spring	30	2.1bar (30psi)
		100	6.9bar (100psi)

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Pilot Ratio	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
PC10-32	SAE-10-3	240	2:1	30.2	0.25	33.9	0.095

* Check bias spring : 2.07 bar (30psi)

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)


PERFORMANCE CURVES

► Pressure Drop

PC10-32


- Port 3 → Port 2 (p)
- - - Port 2 → Port 3 (r)

* 32cSt / 150 ssu oil at 40°C

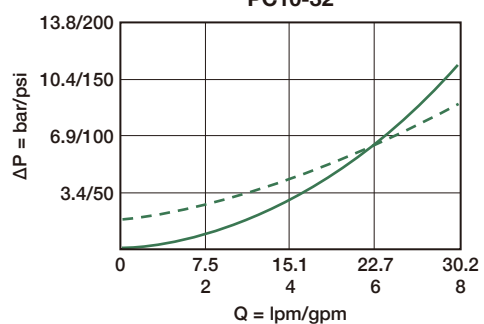

DIMENSION


(UNIT : mm)

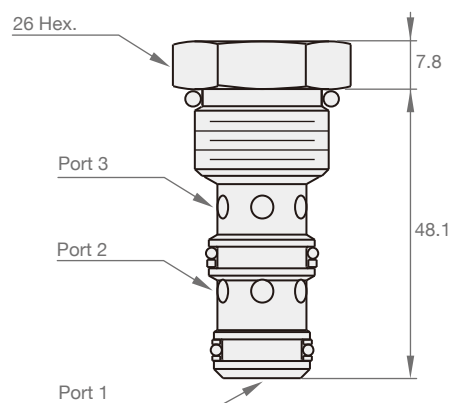

DC-40



SYMBOLS

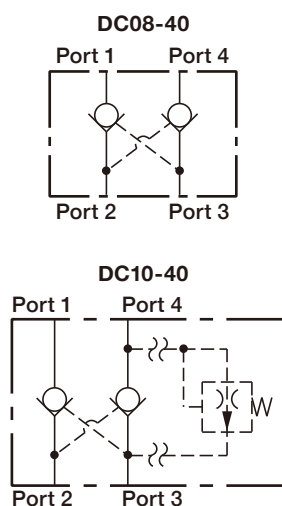

ORDER CODES

DC	08	-	40	-	N	-	25
1	2		1		3		4

1	Model Name	DC-40	
2	Valve Size	08, 10	
3	Material of Seal	N	buna-N
		V	viton
4	Bias Spring	25	1.7 bar (2.5 psi)

MODEL SPEC.

Model	Cavity	Operating Pressure (bar)	Flow (l/min)	Pilot Ratio	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
DC08-40	SAE-08-4	240	19	3 : 1	0.25	27.1	0.08
DC10-40	SAE-10-4	240	30.3		-	33.9	0.12



* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES

► Pressure Drop

- Port 1 → Port 2
- - - - - Port 2 → Port 1
- — — — Port 4 → Port 3
- Port 3 → Port 4


* 32cSt / 150 ssu oil at 40°C

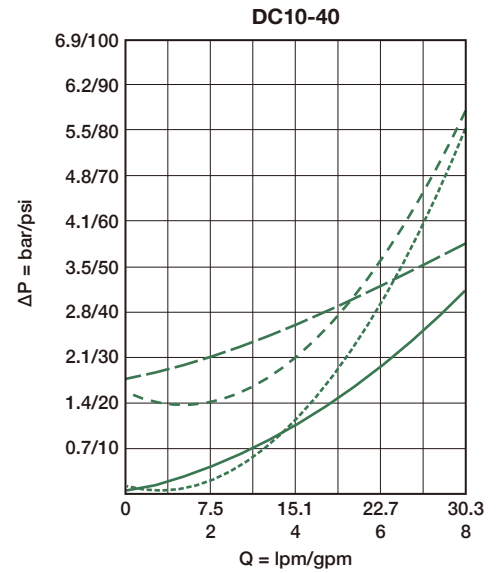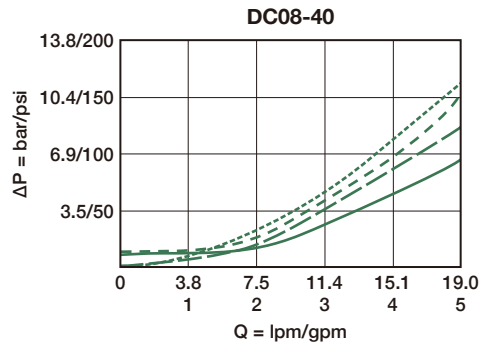


DIMENSION

(UNIT : mm)

► DC08-40

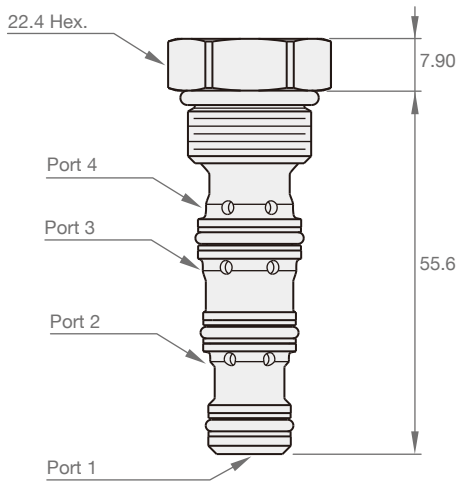


► DC10-40

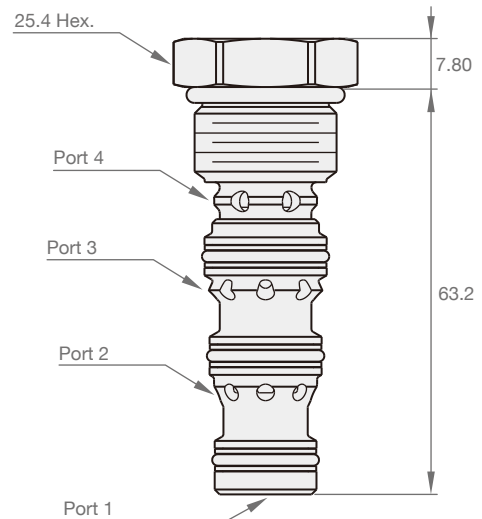

PCS4-10



SYMBOLS



ORDER CODES

PCS4 - **10** - **V** - **40**

1 2 3 4

1	Model Name	PCS4	
2	Valve Size	10	
3	Material of Seal	N	buna-N
		V	viton
4	Bias Spring	40	2.8bar (40psi)
		80	5.5bar (80psi)
		160	11.0bar (160psi)

MODEL SPEC.


Model	Cavity	Operating Pressure (bar)	Flow (l/min)	Internal Leakage (cc/min)	Installation Torque (Nm)	Weight (kg)
PCS4-10	SAE-10-4	210	38	82	33.9	0.145

* Operating temperature : -40 ~ 120°C (-40 ~ 248°F)

PERFORMANCE CURVES


► Controlled Flow

* 21.8cSt / 150 ssu oil at 49°C

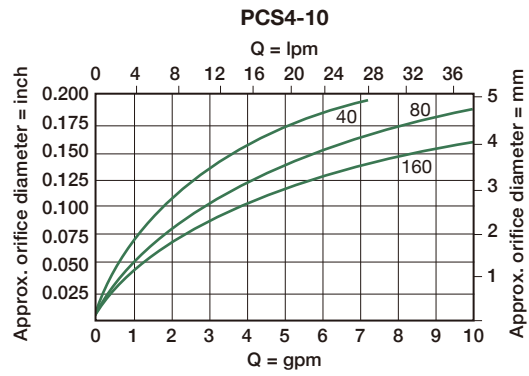

DIMENSION


(UNIT : mm)

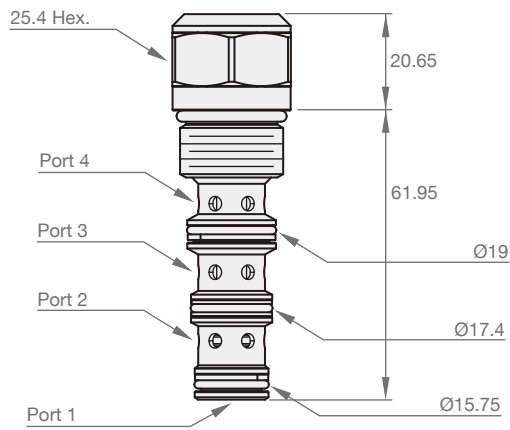

CF10



SYMBOLS



ORDER CODES

CF	10	-	40	-	N
1	2		3		4



1	Model Name	CF	
2	Valve Size	10	
3	Filter Rating	25	25um (surface type)
		40	40um (surface type)
4	Material of Seal	N	buna-N

MODEL SPEC.

Model	Cavity	Flow (l/min / gpm)	Max. Pressure (bar / psi)	Installation Torque (Nm)	Weight (kg)
CF10	SAE-10-2	37.9 / 10	345 / 5000	40/50	0.14


* Operating temperature : -35 ~ 100°C (-31 ~ 212°F)

PERFORMANCE CURVES

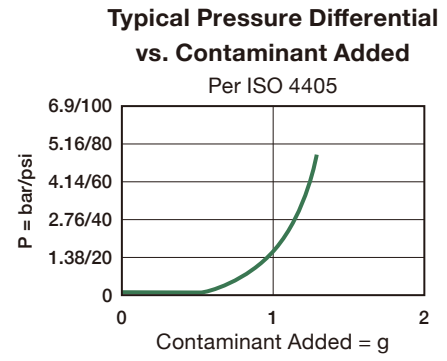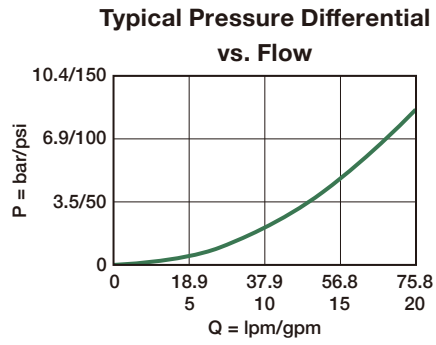

DIMENSION

(UNIT : mm)

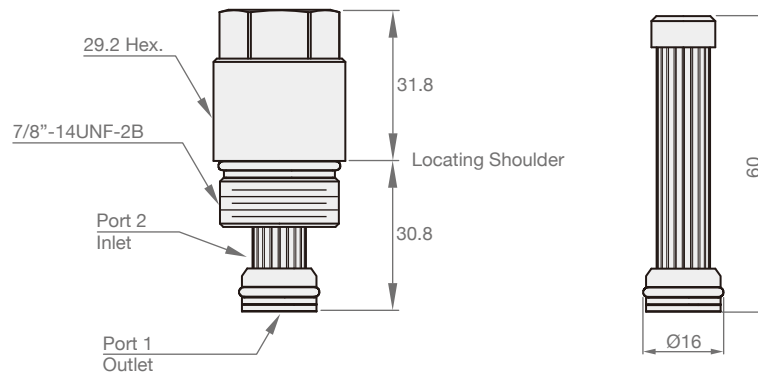

Steed Machinery Co., Ltd.

No. 28, Ruiguang St., South Dist.,
Taichung City 402006,
Taiwan
Tel : +886-4-2285-4867
Fax : +886-4-2285-2848
Email : info@steedmachinery.com.tw

more information
www.steedmachinery.com.tw

